

## 28 to 60 kHz-A (Broadband)

Transformed to 100 ohms minimum (B2)  
Ceramics wired in parallel

### Power Rating:

- 3 kW @ 1% duty cycle
- CW<sup>(4)</sup>: 60W in R509  
40W in CM599, R599

24 x 35.1 mm (1.4 in) PZT

Active Area: 229.9 cm<sup>2</sup> (35.63 in<sup>2</sup>)

Radiating Surface: Epoxy


Q ≈ 2

Cable Type: C44


Cable Length: 15 m (50 ft)

### Notes:

- (1) dB re 1 μPa per volt at 1 meter
- (2) dB re 1 volt per μPa
- (3) Sum of transmitting voltage response and receiving voltage response
- (4) CW Power ratings is for 20°C seawater temperature. Consult Airmar for different housing CW ratings.

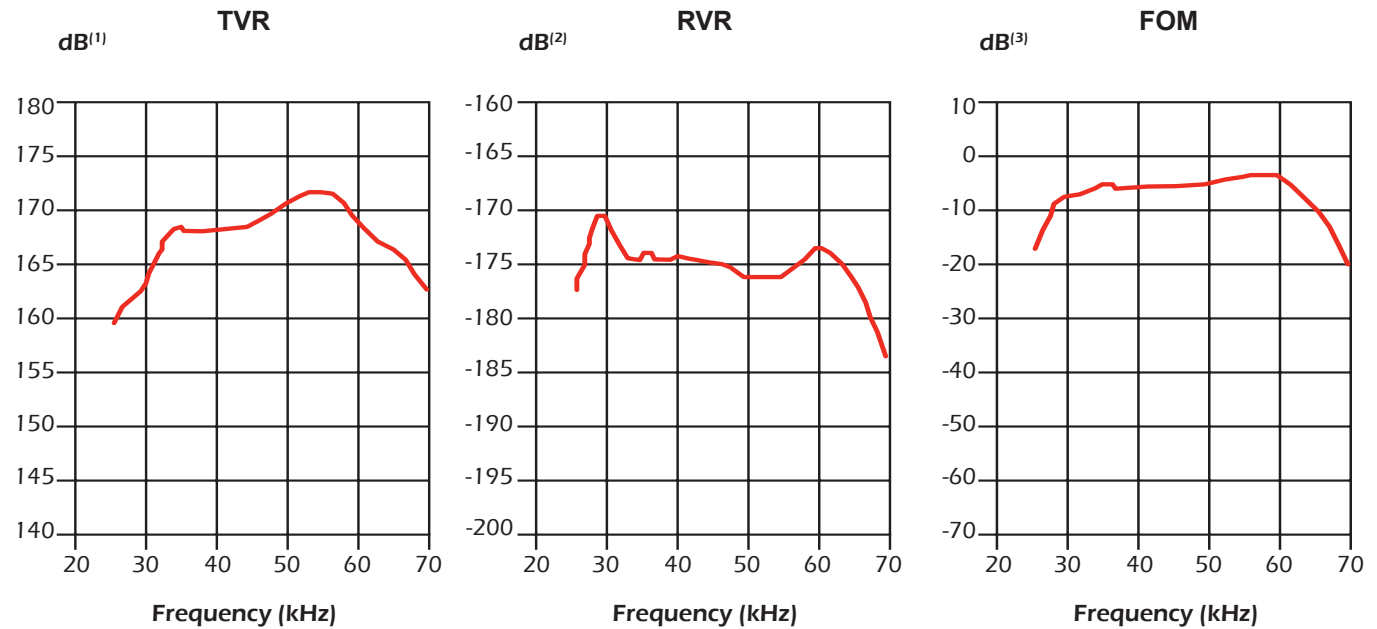

## Transmit Radiation Pattern

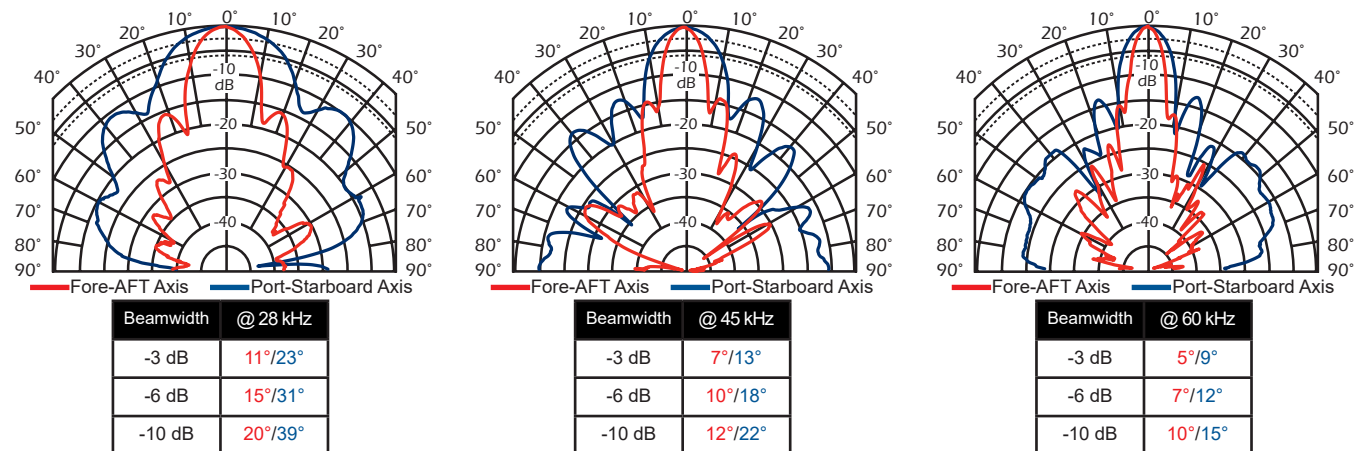

# Technical Data Catalog

## 28 to 60 kHz-A (Broadband)

Note: Impedance data includes cable

**Balanced Impedance Table (Nominal Value) in 20°C Water**

Test Frequency (kHz)	Impedance Magnitude (Ω)	Phase Angle (°)	Series Resistance (Ω)	Series Reactance (Ω)	Parallel Conductance (mS)	Parallel Susceptance (mS)	Parallel Resistance (Ω)	Parallel Capacitance (pF)
28.00	308.55	41.79	230.06	205.61	2.42	-2.16	413.81	-12276.03
29.00	318.78	20.93	297.74	113.90	2.93	-1.12	341.31	-6150.87
30.00	241.28	0.87	241.25	3.68	4.14	-0.06	241.31	-335.76
31.00	193.73	-7.41	192.12	-24.97	5.12	0.67	195.36	3416.12
32.00	145.29	-8.06	143.85	-20.37	6.82	0.96	146.74	4798.72
33.00	128.57	-0.01	128.57	-0.01	7.78	0.00	128.57	3.43
34.00	120.78	8.12	119.58	17.05	8.20	-1.17	122.01	-5471.06
35.00	135.55	12.11	132.54	28.44	7.21	-1.55	138.64	-7037.17
36.00	133.81	6.89	132.85	16.04	7.42	-0.90	134.78	-3960.88
37.00	133.31	7.74	132.09	17.95	7.43	-1.01	134.53	-4345.42
38.00	134.75	7.40	133.63	17.35	7.36	-0.96	135.88	-4001.46
39.00	142.01	9.12	140.22	22.52	6.95	-1.12	143.84	-4557.01
40.00	150.97	3.48	150.69	9.16	6.61	-0.40	151.25	-1599.99
41.00	149.39	2.52	149.25	6.58	6.69	-0.29	149.54	-1143.87
42.00	150.47	-1.08	150.45	-2.85	6.64	0.13	150.50	476.71
43.00	148.40	-2.06	148.31	-5.34	6.73	0.24	148.50	897.42
44.00	150.01	-6.28	149.11	-16.40	6.63	0.73	150.92	2636.57
45.00	144.71	-8.59	143.08	-21.61	6.83	1.03	146.35	3650.59
46.00	144.44	-11.83	141.37	-29.62	6.78	1.42	147.57	4912.27
47.00	142.31	-14.82	137.58	-36.40	6.79	1.80	147.21	6085.48
48.00	132.05	-18.07	125.54	-40.97	7.20	2.35	138.91	7789.92
49.00	119.22	-17.44	113.74	-35.74	8.00	2.51	124.97	8165.83
50.00	112.06	-15.52	107.98	-29.99	8.60	2.39	116.31	7601.44
51.00	109.67	-11.32	107.53	-21.53	8.94	1.79	111.84	5586.70
52.00	108.55	-9.99	106.90	-18.82	9.07	1.60	110.22	4889.39
53.00	109.23	-7.10	108.39	-13.50	9.08	1.13	110.07	3397.43
54.00	108.61	-3.96	108.35	-7.50	9.19	0.64	108.87	1872.96
55.00	113.56	2.37	113.46	4.69	8.80	-0.36	113.66	-1053.14
56.00	125.63	6.09	124.92	13.33	7.92	-0.84	126.34	-2399.70
57.00	136.85	9.33	135.04	22.18	7.21	-1.18	138.68	-3306.52
58.00	162.06	10.90	159.14	30.65	6.06	-1.17	165.04	-3202.70
59.00	190.57	7.57	188.91	25.09	5.20	-0.69	192.24	-1863.70
60.00	220.91	1.96	220.79	7.54	4.52	-0.15	221.04	-409.63

**80 to 130 kHz-B (Broadband)**  
 Transformed to 100 ohms minimum (B1)

Power Rating:


- 2 kW @ 1% duty cycle
- CW<sup>(4)</sup>: 30W in R509, R609  
 25W in CM199, CM599,  
 PM111, R109,  
 R111, R599

88 mm (3.46 in) PZT  
 Active Area: 61 cm<sup>2</sup> (9.4 in<sup>2</sup>)  
 Radiating Surface:  
 Cast Resin/Urethane  
 Q ≈ 2  
 Cable Type: C44-02  
 Cable Length: 10 m (33 ft)


Notes:

- (1) dB re 1 μPa per volt at 1 meter
- (2) dB re 1 volt per μPa
- (3) Sum of transmitting voltage response and receiving voltage response
- (4) CW Power ratings is for 20°C seawater temperature. Consult Airmar for different housing CW ratings.


**TVR**  
dB<sup>(1)</sup>

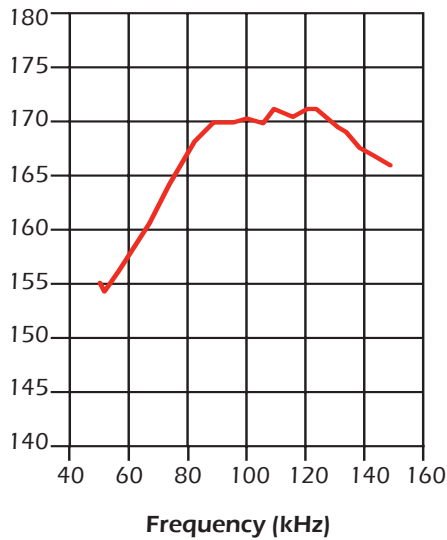


**RVR**  
dB<sup>(2)</sup>

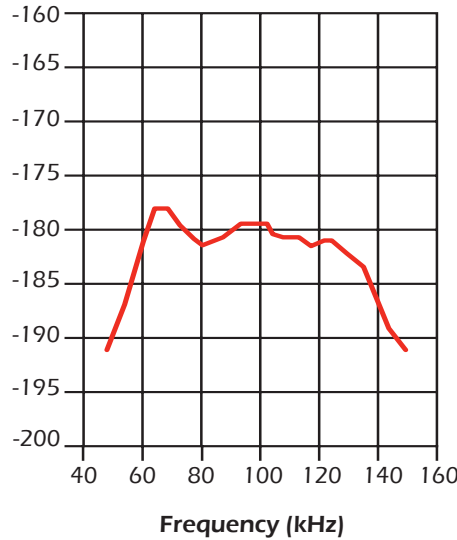


**FOM**  
dB<sup>(3)</sup>

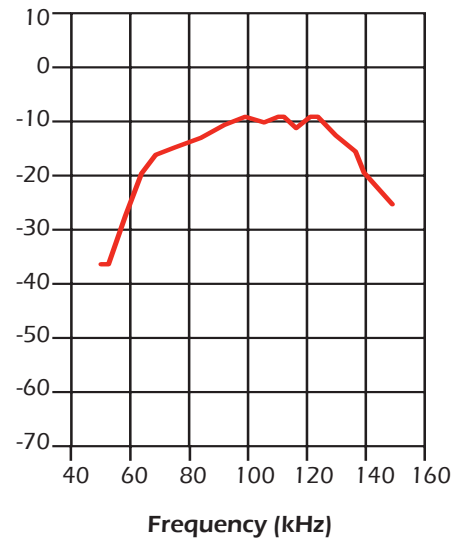


**Transmit Radiation Pattern**

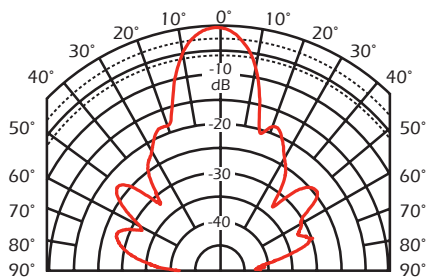

Beamwidth	@ 80 kHz
-3 dB	13°
-6 dB	18°
-10 dB	23°

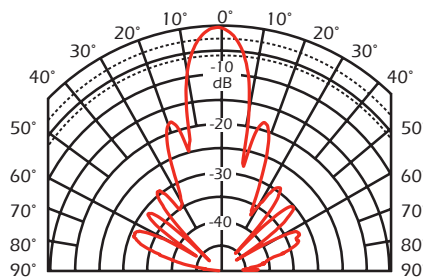

Beamwidth	@ 100 kHz
-3 dB	10°
-6 dB	13°
-10 dB	17°

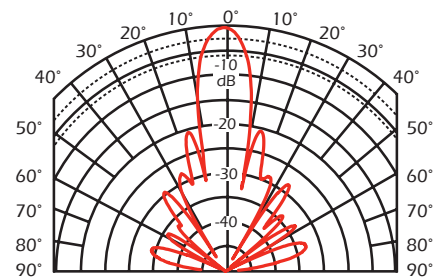

Beamwidth	@ 130 kHz
-3 dB	8°
-6 dB	11°
-10 dB	14°

# Technical Data Catalog

## 80 to 130 kHz-B (Broadband)

Note: Impedance data includes cable

**Balanced Impedance Table (Nominal Value) in 20°C Water**

Test Frequency (kHz)	Impedance Magnitude (Ω)	Phase Angle (°)	Series Resistance (Ω)	Series Reactance (Ω)	Parallel Conductance (mS)	Parallel Susceptance (mS)	Parallel Resistance (Ω)	Parallel Capacitance (pF)
70.00	352.49	9.16	348.00	56.10	2.80	-0.45	357.04	-1026.46
72.00	300.17	-7.39	297.68	-38.61	3.30	0.43	302.69	947.26
74.00	238.95	-15.07	230.73	-62.12	4.04	1.09	247.46	2339.85
76.00	193.20	-16.98	184.78	-56.41	4.95	1.51	202.00	3164.75
78.00	166.77	-14.88	161.18	-42.84	5.80	1.54	172.56	3142.75
80.00	152.62	-12.33	149.10	-32.60	6.40	1.40	156.22	2784.39
82.00	142.34	-10.22	140.08	-25.24	6.91	1.25	144.63	2418.34
84.00	136.54	-7.89	135.24	-18.75	7.25	1.01	137.84	1905.72
86.00	131.32	-5.61	130.69	-12.84	7.58	0.74	131.95	1377.97
88.00	128.21	-1.96	128.13	-4.39	7.80	0.27	128.28	483.53
90.00	131.64	1.95	131.56	4.48	7.59	-0.26	131.72	-456.88
92.00	141.65	3.79	141.34	9.37	7.04	-0.47	141.96	-807.72
94.00	150.64	2.53	150.50	6.66	6.63	-0.29	150.79	-497.04
96.00	156.64	-0.07	156.64	-0.19	6.38	0.01	156.64	12.52
98.00	159.32	-2.17	159.21	-6.05	6.27	0.24	159.44	386.78
100.00	162.35	-3.34	162.07	-9.46	6.15	0.36	162.62	571.22
102.00	169.56	-5.60	168.75	-16.56	5.87	0.58	170.38	898.66
104.00	174.55	-10.39	171.69	-31.47	5.64	1.03	177.45	1580.69
106.00	167.56	-15.14	161.74	-43.75	5.76	1.56	173.58	2339.90
108.00	157.16	-16.91	150.36	-45.72	6.09	1.85	164.27	2728.03
110.00	150.50	-15.71	144.88	-40.76	6.40	1.80	156.35	2603.83
112.00	153.63	-14.00	149.07	-37.18	6.32	1.58	158.34	2238.26
114.00	161.95	-15.32	156.20	-42.78	5.96	1.63	167.92	2277.07
116.00	163.62	-19.19	154.53	-53.78	5.77	2.01	173.25	2756.23
118.00	155.05	-21.19	144.57	-56.04	6.01	2.33	166.29	3144.16
120.00	152.02	-18.69	144.00	-48.73	6.23	2.11	160.49	2796.22
122.00	162.34	-17.10	155.16	-47.74	5.89	1.81	169.85	2363.38
124.00	175.29	-18.48	166.25	-55.57	5.41	1.81	184.83	2321.15
126.00	188.46	-22.04	174.69	-70.72	4.92	1.99	203.32	2515.12
128.00	197.94	-27.87	174.99	-92.52	4.47	2.36	223.91	2936.16
130.00	199.27	-34.00	165.20	-111.43	4.16	2.81	240.36	3435.51
132.00	197.51	-38.56	154.43	-123.13	3.96	3.16	252.60	3805.58
134.00	200.38	-43.53	145.29	-138.00	3.62	3.44	276.36	4082.07
136.00	199.95	-50.19	128.01	-153.60	3.20	3.84	312.32	4496.08
138.00	190.44	-57.56	102.16	-160.71	2.82	4.43	354.99	5110.90
140.00	174.34	-63.38	78.12	-155.86	2.57	5.13	389.06	5829.30